


Quality with a system. Worldwide

We at **BEKO TECHNOLOGIES** develop, manufacture and distribute products and systems for an optimised compressed-air and compressed-gas quality throughout the world. From the processing of compressed air and compressed gas through filtration, drying and proven condensate technology, to instruments for the quality supervision and measurement. From a simple compressed-air application to demanding process technologies.

Since its founding, **BEKO TECHNOLOGIES** has continuously given decisive impulses to compressed-air technology. Our pathbreaking ideas have exerted considerable influence on the development. In order to keep this going, more than 10 % of our employees work in the field of innovation. With this potential and with our personal commitment, we at **BEKO TECHNOLOGIES** stand for trend-setting technologies, products and services.

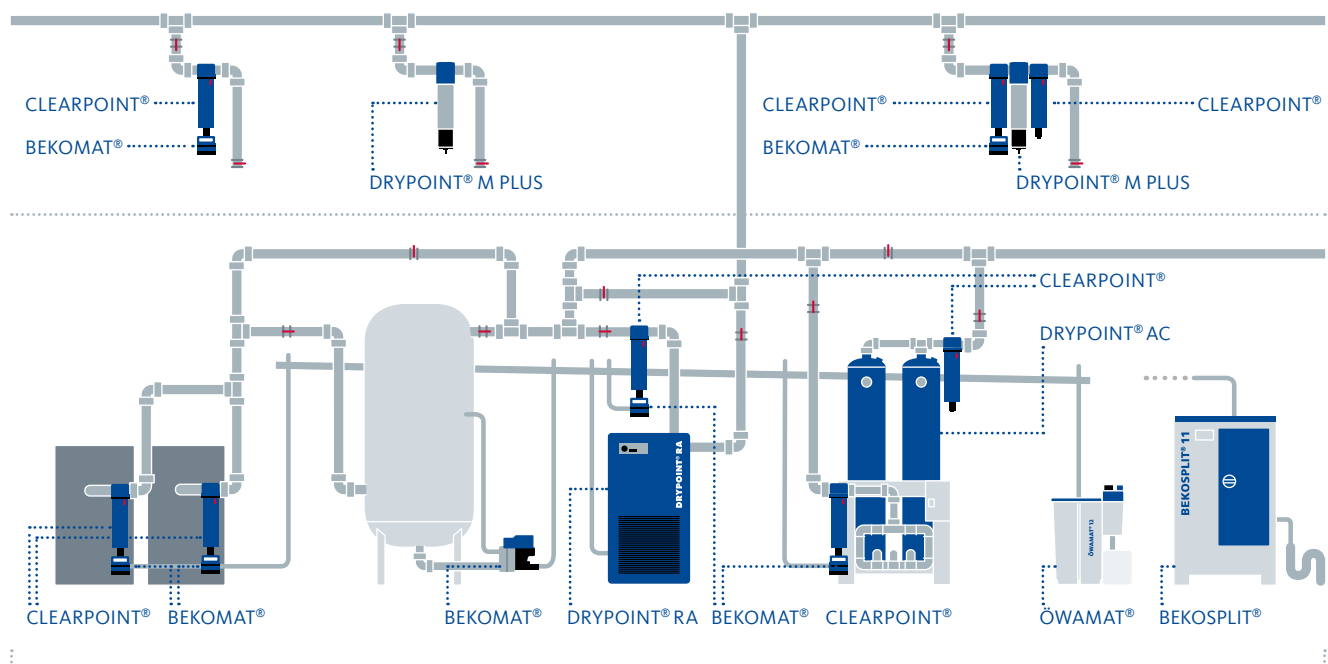

Our fields of competence



Condensate technology
BEKOMAT® | ÖWAMAT® | BEKOSPLIT®



Filtration | CLEARPOINT®



Process technology
BEKOBLIZZ® | BEKOKAT®



Drying | DRYPOINT®



Measurement technology
METPOINT®



Service



BEKO TECHNOLOGIES GMBH
Im Taubental 7
41468 Neuss | Germany
Phone +49 2131 988-0
Fax +49 2131 988-900
info@beko-technologies.com
www.beko-technologies.com



The publication of the present list renders all previous lists null and void. Prices to be understood ex works excl. of packing and Taxes (VAT). Man. recom. prices. Subject to technical alterations and errors. Subject to technical changes without prior notice; the information and data do not represent product characteristics within the meaning of the German Civil Code (BGB).
© Registered trademarks of **BEKO TECHNOLOGIES GMBH**, Neuss, Germany

Edition: January 2016

NEW:
2 years
warranty

Price list 2016

Components and systems for an optimised
compressed-air and compressed-gas
technology





BEKO TECHNOLOGIES worldwide

Europe

- ■ Germany, Austria, Switzerland
- France
- Greece
- Great Britain, Ireland
- Italy
- Netherlands, Belgium, Luxemburg
- Norway
- Poland
- Sweden, Denmark, Finland, Iceland
- Slovakia
- Spain, Portugal
- Czech Republic
- Turkey
- Hungary

Asia

- ■ China
- ■ India
- Indonesia
- Japan
- Korea
- Pakistan
- Russia
- Singapore
- Thailand, Malaysia
- Taiwan

Middle East

- Egypt
- Israel
- Saudi Arabia
- United Arab Emirates

Africa

- South Africa

America

- Brazil
- Chile
- Canada
- Mexico
- Peru
- ■ USA

Australia

- Australia

■ Production | ■ Subsidiary | ■ Sales partner

CONDENSATE DRAINAGE
CONDENSATE PROCESSING
Drying
FILTRATION
PRODUCTS
MEASUREMENT
PROCESS TECHNOLOGY
SYSTEMS
FILTRATION
Drying
SERVICES
MAINTENANCE
MEASUREMENT
TRAINING

Foreword

Reliable, clean, more effective compressed air technology from BEKO TECHNOLOGIES

BEKO TECHNOLOGIES stands for compressed air technology at its best. For more than three decades, **BEKO TECHNOLOGIES** has developed, manufactured and sold extremely efficient, high quality components and systems for compressed air treatment and condensate management. Today **BEKO TECHNOLOGIES** offers a full range of products across the entire field of compressed air technology. Expert advice and good service are seen as a trademark of our company.

A dense network of **BEKO TECHNOLOGIES** subsidiaries and experienced sales partners guarantee hands-on customer service at the same high standard. This price list offers our partners a great deal of important information – far beyond the actual pricing.

If you have any questions, our staff will be happy to help you at any time.

BEKO TECHNOLOGIES Company Data

- › founded in 1982
- › independent, family founder-led company
- › headquarters in Neuss, Germany
- › production in Neuss, Netphen and Löffingen Germany | Atlanta, Georgia, USA | Hyderabad, India | Shanghai, China
- › more than 440 employees worldwide
- › 15 sales subsidiaries
- › worldwide network of sales partners
- › certified in accordance with EN ISO 9001:2008



Condensate drainage
BEKOMAT®




Condensate processing
ÖWAMAT® | BEKOSPLIT®



Filtration
CLEARPOINT®

Contents

BEKO TECHNOLOGIES worldwide Foreword	2	BEKOSPLIT® Emulsion splitting plant	27
BEKOMAT® Condensate Drains	7	BEKOSPLIT® 11 12 13 14 14 S 15 16	28
Specifications for worldwide use	8	Expendable materials	28
BEKOMAT® 20 20 FM	9	Accessories	29
BEKOMAT® 31 U 32 U 33 U 33 U CO	9	Service	30
BEKOMAT® 12 12 CO 12 CO PN 63		Spare parts	31
13 13 CO 13 CO PN 25 13 CO PN 40	10	CLEARPOINT® Compressed air filters	33
BEKOMAT® 14 14 CO 14 CO PN 25 16 CO	10	Performance spectrum Housing specifications	
BEKOMAT® 12 KW	11	Quality class	34
BEKOMAT® 3 E 25 3 E 63 6 E 25	11	Installation charts	35
BEKOMAT® 3 CO LA 6 CO LA	12	CLEARPOINT® W Water separator	36
BEKOMAT® 3 CO EX 3 E EX 6 CO EX 6 E EX	12	CLEARPOINT® 3E (C-N) Filters for the removal of aerosols and solid particles	38
Accessories	13	CLEARPOINT® 3E (R) Dust filter	42
Spare parts	16	CLEARPOINT® A Activated carbon filter	46
ÖWAMAT® Oil-water separator	19	CLEARPOINT® V Activated carbon filter with cartridge	50
Specifications for worldwide use	20	CLEARPOINT® V Activated carbon adsorber including a dust filter	51
ÖWAMAT® 12 14 15 16 with pre-separation system	21	CLEARPOINT® V Activated carbon adsorber without dust filter	52
ÖWAMAT® 10 11 12 14 15 16 without pre-separation system	21	CLEARPOINT® PN 50 High pressure water separator	54
Accessories	22	CLEARPOINT® PN 50 High pressure filter	55
Spare parts	24	CLEARPOINT® 100 – 500 bar High pressure filter	56
Service	26	CLEARPOINT® PIT Filter housing G thread	58
		CLEARPOINT® PIF Filter housing flange	59
		CLEARPOINT® PIW Filter housing weld-on-end	60
		CLEARPOINT® FE ... SR Sterile filter element	61
		CLEARPOINT® FE ... ST Steam filter element	62
		CLEARPOINT® Sterile- and Steamfilter Accessories	65
		CLEARPOINT® H Compressed air heater	66
		Accessories	67
		Filters and alternative elements	71

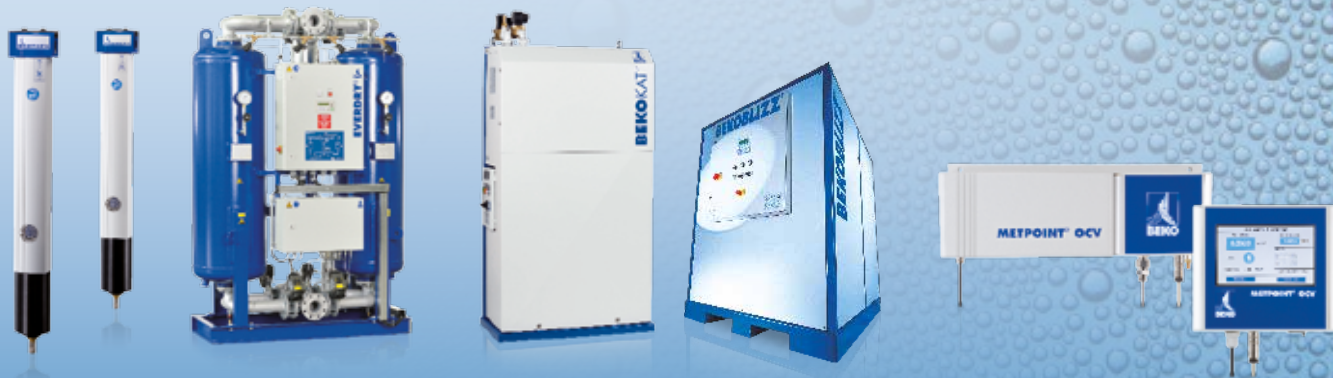

Drying
DRYPOINT® | EVERDRY®



Process technology
BEKOKAT® | BEKOBLIZZ®



Measurement technology
METPOINT®

Contents

DRYPOINT® Drying	83	BEKOKAT® Catalytic Converter	129
DRYPOINT® RA/AC Compressed air refrigeration dryer air cooled	84	BEKOBLIZZ® Compressed air chiller	133
	88	BEKOBLIZZ® LC Compressed air chiller	134
DRYPOINT® RA/TAC Compressed air refrigeration dryer with anti corrosion treatment	92		
DRYPOINT® RA/WC Compressed air refrigeration dryer water cooled	94	METPOINT® Measurement technology	137
DRYPOINT® RA/WC TBH Compressed air refrigeration dryer water cooled with tube bundle heat exchanger	96	METPOINT® OCV	138
DRYPOINT® RA/AC HT Compressed air refrigeration dryer for high inlet temperature	97	METPOINT® OCV Accessories	142
DRYPOINT® RS HP/AC High pressure compressed air refrigeration dryer up to 50 bar (45 bar)	98	METPOINT® OCV Accessories for 40-bar applications	143
DRYPOINT® RA Accessories	100	METPOINT® OCV Spare parts	144
DRYPOINT® M PLUS	101	METPOINT® OCV Service	144
DRYPOINT® M Accessories	103	METPOINT® MMA	145
DRYPOINT® AC (AC 119 – AC 196)		METPOINT® BDL	148
Heatless adsorption dryer	106	METPOINT® BDL compact	150
DRYPOINT® AC (AC 119 – AC 196) Accessories	107	METPOINT® BDL portable	152
DRYPOINT® AC (AC 205 – AC 295)		METPOINT® UD01	154
Heatless adsorption dryer	108	METPOINT® FLM	156
DRYPOINT® AC (AC 205 – AC 295) Accessories	109	METPOINT® FLM Accessories	157
DRYPOINT® HL Heatless adsorption dryer	110	METPOINT® FLM Service	159
DRYPOINT® AC/HL	111	METPOINT® FLM compact	160
DRYPOINT® AC HP High pressure adsorption dryer	112	METPOINT® FLM compact Accessories	161
		METPOINT® FLM compact Service	161
EVERDRY® Compressed-air adsorption dryer for large volumes	115	METPOINT® DPM stationary	162
EVERDRY® FRP	116	METPOINT® DPM Sensor SD11 SD21 SD23	162
EVERDRY® FRA-V	118	METPOINT® DPM stationary Accessories	163
EVERDRY® FRA	119	METPOINT® DPM stationary Service	163
EVERDRY® FRL-V	120	METPOINT® PRM	164
EVERDRY® FRL	121	METPOINT® Pressure sensor Accessories	164
EVERDRY® FRP FRA-V FRA FRL-V FRL options	122	METPOINT® LKD	165
EVERDRY® HOC-P	124	METPOINT® LKD Accessories	165
EVERDRY® COMBITROC	126	Minimum pressure valve	166
		GTC	149

More than

3

million
worldwide

BEKOMAT® condensate drains

With a total of three million units sold since its presentation in 1982, the electronically level-controlled BEKOMAT® condensate drain now achieved another international top mark.



Condensate drainage | BEKOMAT®




BEKOMAT® Intelligent condensate drains

With more than 3,000,000 devices installed worldwide, BEKOMAT® condensate drains are the industrial standard for reliable and economic condensate discharge. The comprehensive BEKOMAT® programme makes it possible to select an optimum device for every compressor capacity and type, as well as for specific system pressures and operating conditions.


Special BEKOMAT® devices are available for extremely aggressive condensates, hazardous areas (Ex protection), low pressure or vacuum conditions, and no-load operation of multistage compressors.

Your **BEKO TECHNOLOGIES** specialist will be glad to provide you with detailed information.

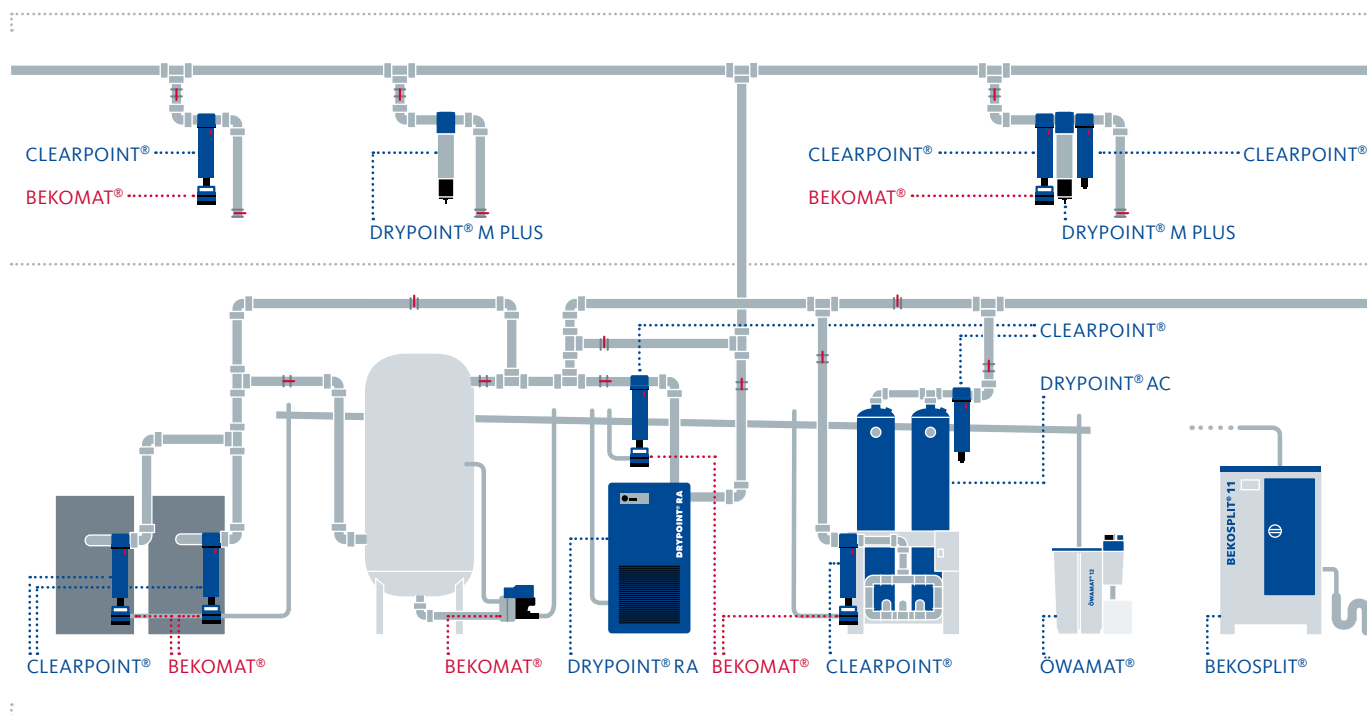



BEKOMAT®: Specifications for worldwide use

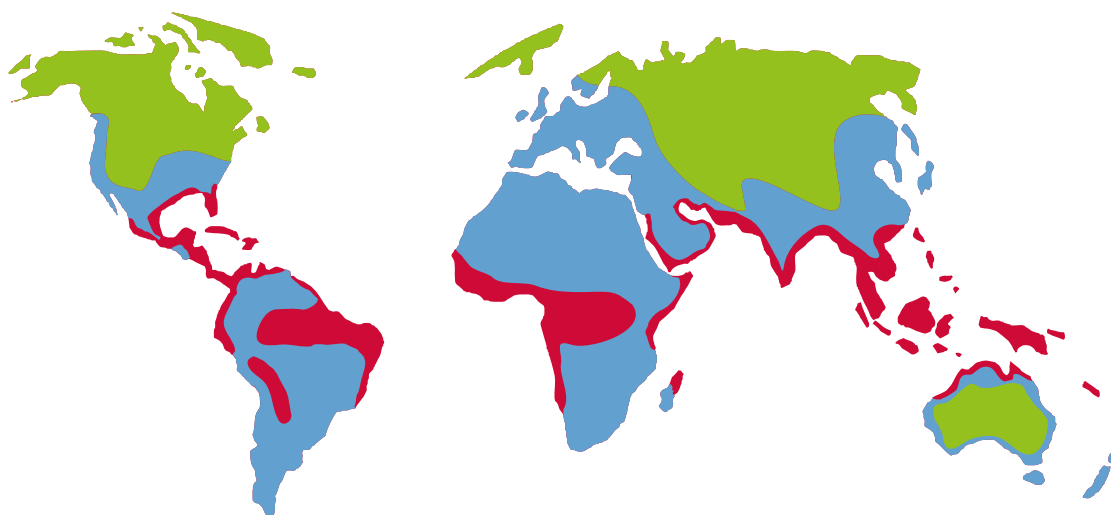

The capacity figures in this price list refer to the "■" climate zone.

BEKOMAT®	31U	32U	33U	20	20 FM	12	13	14	16
Max. compressor performance (m³/min)	3 2.5 1.5	6 5 3.5	12 10 7	5 4 2.5	5 4 2.5	8 6,5 4	35 30 20	150 130 90	1700 1400 1000
Max. dryer performance (m³/min)	6 5 3	12 10 7	24 20 14	10 8 5	10 8 5	16 13 8	70 60 40	300 260 180	3400 2800 2000
Max. filter performance (m³/min)	30 25 15	60 50 35	120 100 70	50 40 25	50 40 25	80 65 40	350 300 200	1500 1300 900	

Adjusted capacity figures for BEKOMAT®

Capacity tests along with our extensive experience have enabled us to make locational adjustments of our capacity figures for BEKOMAT® and ÖWAMAT®. By taking global climate data into account, the device capacity can be defined more specifically in relation to the place of application.

BEKOMAT® is designed for a region by means of the three climatic zones:



- e.g. Northern Europe, Canada, Northern USA, Central Asia
- e.g. Central and Southern Europe, Central America
- e.g. South-East Asian coastal regions, Oceania, Amazon and Congo region

Temperature range

+1 to +60 °C | BEKOMAT® 12, 13, 14, 16 employable down to -25 °C with a heating system and insulation according to good professional practice. If you need further information about the three climate zones, contact your local **BEKO TECHNOLOGIES** dealer, **BEKO TECHNOLOGIES** subsidiary, **BEKO TECHNOLOGIES** Germany or look into our website at www.beko-technologies.com



Filter BEKOMAT®: 20 | 20 FM






Dimensions in mm	Plastic housing	Plastic housing + potential free contact + external test + filter management
BEKOMAT®	20	20 FM
Filter capacity max. (m³/min) (p.8)	40	40
Pressure (bar [g])	0.8 ... 16	0.8 ... 16
Voltage*	230 VAC 50 ... 60 Hz	230 VAC 50 ... 60 Hz
Condensate feed	1 x G½ i 1 x G¾ a	1 x G½ i 1 x G¾ a
Temperature min/max (°C)	+1 ... +60	+1 ... +60
Application	a/b	a/b
Price group 12		
Order ref.	4001841	4003051
Price (€)	187	244

*Optionally, the following voltage variants are also available: 200 VAC | 115 VAC | 100 VAC | 48 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate

BEKOMAT® with service innovation: 31U | 32U | 33U | 33U CO



Dimensions in mm	Aluminium housing	Aluminium housing + potential free contact	Aluminium housing + potential free contact	Aluminium housing, hardcoated + potential free contact
BEKOMAT®	31U	32U	33U	33U CO
Compr. Capacity (m³/min) (p.8)	2.5	5	10	10
Pressure (bar [g])	0.8 ... 16	0.8 ... 16	0.8 ... 16	0.8 ... 16
Voltage	95 ... 240 VAC ± 10% 100 ... 125 VDC ± 10% 50 ... 60 Hz	95 ... 240 VAC ± 10% 100 ... 125 VDC ± 10% 50 ... 60 Hz	95 ... 240 VAC ± 10% 100 ... 125 VDC ± 10% 50 ... 60 Hz	95 ... 240 VAC ± 10% 100 ... 125 VDC ± 10% 50 ... 60 Hz
Condensate feed	1 x G½	1 x G½	3 x G½	3 x G½
Temperature min/max (°C)**	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60
Application	a/b	a/b	a	a/b
Price group 12				
Order ref.	4024381	4024387	4024393	4024395
Price (€)	161	199	346	396



All BEKOMAT® types are also available in the US version (NPT threads). Prices on request.

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate

*Optionally, the following voltage variants are also available: 24 ... 48 VAC ± 10% | 50 ... 60 Hz
18 ... 72 VDC ± 10% | 50 ... 60 Hz

** Temperature optional 70°C

Standard BEKOMAT®: 12 | 12 CO | 12 CO PN 63 13 | 13 CO | 13 CO PN 25 | 13 CO PN 40



Dimensions in mm



Optionally: external Test	Aluminium housing	Aluminium housing, hardcoated	Aluminium housing	Aluminium housing, hardcoated	Aluminium housing, hardcoated	Aluminium housing, hardcoated	Aluminium housing, hardcoated	Aluminium housing, hardcoated
BEKOMAT®	12	12 CO	12 CO PN 63	13	13 CO	13 CO PN 25	13 CO PN 40	13 CO PN 50
Compr. Capacity (m³/min) (p. 8)	6,5	6,5	6,5	30	30	30	30	30
Pressure (bar [g])	0.8 ... 16	0.8 ... 16	1.2 ... 63	0.8 ... 16	0.8 ... 16	1.2 ... 25	1.2 ... 40	1,2 ... 50
Voltage*	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50–60 Hz	230 VAC 50 ... 60 Hz
Condensate feed	1 x G½	1 x G½	1 x G½	2 x G½	2 x G½	2 x G½	2 x G½	2 x G½
Temperature min ... max (°C) (p. 13)	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60
Application	a	a/b	a/b	a	a/b	a/b	a/b	a/b
Price group 10								
Order ref.	2000018	2000019	2000020	2000021	2000022	2000360	2001287	2002699
Price (€)	317	350	588	454	636	837	934	934

All BEKOMAT® types also available as USA version (NPT threads). Prices on request.

* Optionally, the following voltage variants are also available: 200 VAC | 115 VAC | 100 VAC | 48 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate

Standard BEKOMAT®: 14 | 14 CO | 14 CO PN 25 16 CO



Dimensions in mm

Optionally: external Test	Aluminium housing	Aluminium housing, hardcoated	Aluminium housing, hardcoated	Aluminium housing, hardcoated
BEKOMAT®	14	14 CO	14 CO PN 25	16 CO
Compr. Capacity (m³/min) (p. 8)	130	130	130	1400
Pressure (bar [g])	0.8 ... 16	0.8 ... 16	0.8 ... 16	0.8 ... 16
Voltage*	230 VAC 50 ... 60 Hz	230 VAC 50 ... 60 Hz	230 VAC 50 ... 60 Hz	230 VAC 50 ... 60 Hz
Condensate feed	3 x G¾	3 x G¾	3 x G¾	2 x G¾ 1 x G1
Temperature min/max (°C) (p. 13)	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60
Application	a	a/b	a/b	a/b
Price group 10				
Order ref.	2000023	2000024	2002477	2000025
Price (€)	603	802	1,001	1,335


All BEKOMAT® types also available as USA version (NPT threads). Prices on request.

* Optionally, the following voltage variants are also available: 200 VAC | 115 VAC | 100 VAC | 48 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate



BEKOMAT® Moisture Indicator: 12 KW



Depth: 65


Dimensions in mm

Moisture Indicator Aluminium housing


BEKOMAT®	12 KW
Pressure (bar [g])	16
Condensate feed	1 x G½
Voltage	230 VAC 50 ... 60 Hz
Temperature min/max (°C) (p. 13)	+1 ... +60
Application	a/b
Price group 10	
Order ref.	2000026
Price (€)	254

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate

Stainless Steel BEKOMAT®: 3 E 25 | 3 E 63 | 6 E 25



Depth: 160



Depth: 260

Dimensions in mm

Stainless steel housing + potential free contact

Stainless steel housing + potential free contact

BEKOMAT®	3 E 25	3 E 63	6 E 25
Compr. Capacity (m³/min) (p. 8)	100	100	1000
Pressure (bar [g])	0.8 ... 25	0.8 ... 63	0.8 ... 25
Voltage*	230 VAC 50 – 60 Hz	230 VAC 50 – 60 Hz	230 VAC 50 – 60 Hz
Condensate feed	3 x G¾	3 x G¾	2 x G¾ 1 x G1
Temperature min/max (°C) (p.13)	+1 ... +60	+1 ... +60	+1 ... +60
Application	a/b/c	a/b/c	a/b/c
Price group 11			
Order ref.	2800236	2800247	2800288
Price (€)	2,750	2,790	4,450



BEKOMAT® 3 and 6: Optionally, the following voltage variants are also available: 200 VAC | 110 VAC | 100 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | b: oil-free, often aggressive condensate | c: aggressive condensate from gas compressors (after prior examination).

BEKOMAT® stainless steel, with no-load valve and also available as Ex and low pressure device | Minimum pressure: 0.4 bar [g]. Price on request.

BEKOMAT® stainless steel and Ex. Also available as vacuum device | Minimum pressure: 0.1/1.8 bar (abs.). Price on request.

BEKOMAT® with No-Load Valve: 3 CO LA | 6 CO LA





Dimensions in mm	Aluminium housing, hardcoated + potential free contact	Aluminium housing, hardcoated + potential free contact
BEKOMAT®	3 CO LA	6 CO LA
Compr. Capacity (m³/min) (p. 8)	100	1000
Pressure (bar [g])	0 ... 25	0 ... 16
Voltage*	230 VAC 50 ... 60 Hz	230 VAC 50 ... 60 Hz
Condensate feed	3 x G¾	1x G1, 2 x G¾
Temperature min/max (°C) (p. 13)	+1 ... +60	+1 ... +60
Application	a, b	a, b
Price group 10		
Order ref.	2800198	2800260
Price (€)	1,235	1,668

BEKOMAT® 3 and 6: Optionally, the following voltage variants are also available: 200 VAC | 110 VAC | 100 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | **b:** oil-free, often aggressive condensate

BEKOMAT® Explosion Proof (ATEX certified): 3 CO EX | 3 E EX | 6 CO EX | 6 E EX



Dimensions in mm	Aluminium housing, hardcoated	Stainless steel housing	Aluminium housing, hardcoated	Stainless steel housing
BEKOMAT®	3 CO EX	3 E EX	6 CO EX	6 E EX
Compr. Capacity (m³/min) (p. 8)	100	100	1000	1000
Pressure (bar [g])	0.8 ... 16	0.8 ... 16	0.8 ... 16	0.8 ... 16
Voltage*	12 VDC	12 VDC	12 VDC	12 VDC
Condensate feed	3 x G¾	3 x G¾	2 x G¾ 1x G1	2 x G¾ 1x G1
Temperature min/max (°C)	+1 ... +60	+1 ... +60	+1 ... +60	+1 ... +60
Application	a, b	a, b, c	a, b	a, b, c
Price group 11				
Order ref.	4004952	4004953	4004954	4004955
Price (€)	1,317	3,131	1,734	4,690

Prices for the BEKOMAT® Ex are exclusive 12 VDC power supply for explosive atmospheres.

BEKOMAT® 3 and 6: Optionally, the following voltage variants are also available: 200 VAC | 110 VAC | 100 VAC | 24 VAC | 24 VDC

a: Oil-contaminated condensate | **b:** oil-free, often aggressive condensate | **c:** aggressive condensate from gas compressors (after prior examination).



BEKOMAT® explosion protection also available as low pressure device | Minimum pressure: 0.4 bar [g]. Price on request.

BEKOMAT® explosion protection also available as vacuum device | Minimum pressure: 0.1 ... 0.8 bar (abs.). Price on request.



BEKOMAT® Accessories


BEKOMAT® EX: Accessories



For BEKOMAT®	Recommended intrinsic safety power supply 12 VDC		Recommended isolation amplifier for the connection of the BEKOMAT® Ex potential free contact
Voltage*	85 ... 230 VAC	24 VAC/VDC	230 VAC
Price group 14			
Order ref.	4005140	4010890	4006591
Price (€)	595	646	272

Prices quoted are net.

BEKOMAT®: Thermostatically Controlled Heating | Trace Heating System



with adapters and gaskets

with terminal box

BEKOMAT®	Thermostatically Controlled Heating			Trace Heating System
Performance min max (W)	95 ... 125	103 ... 137	50	10
Pressure (bar [g])	25	25	25	–
Voltage*	200 ... 230 VAC	100 ... 115 VAC	24 VAC/VDC	230 VAC
Temperature min/max (°C)	–25 ... +60	–15 ... +60	–5 ... +60	–25 ... +60
Length (m)				1 x 1, 1 x 3
				Other lengths on request 61 (€)/m
Price group 13				
Order ref.	2801244	2801245	2801247	2801233
Price (€)	312	312	312	587

115 ... 230 VAC with correct insulation of BEKOMAT® for temperatures down to –25 °C

100 ... 200 VAC with correct insulation of BEKOMAT® for temperatures down to –15 °C


Caution! Thermostatically controlled heating is not suitable for:

BEKOMAT® 10, 20, 21, 31/31U, 32/32U, 33/33U, as well as for 40, 50 and 63 bar [g] operating pressure, and ex-protection areas



BEKOMAT® Accessories


BEKOMAT®: Insulation Shells

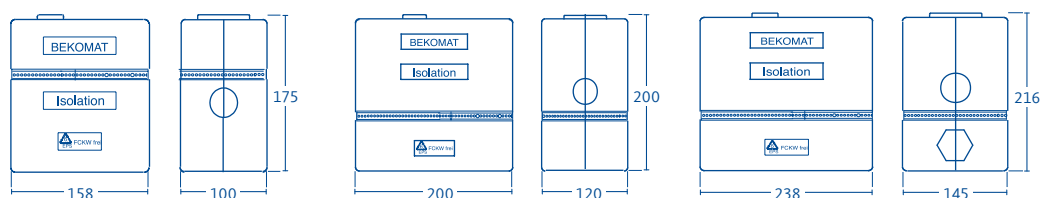

Dimensions in mm


For BEKOMAT®	12 12 CO 12 CO PN 63	13 13 CO 13 CO PN 25 13 CO PN 40 13 CO PN 50	14 14 CO 14 CO PN 25
Price group 13			
Order ref.	2000195	2000033	2000034
Price (€)	38	42	45

BEKOMAT®: Brackets Wall and Floor

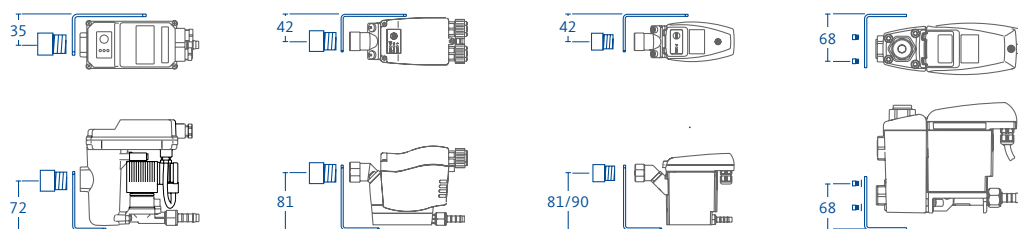

Dimensions in mm

For BEKOMAT®	12 12 CO 20	21	31U 32U	33U
Price group 13				
Order ref.	2000035	2001917	4010105	4012883
Price (€)	24	on request	25	22

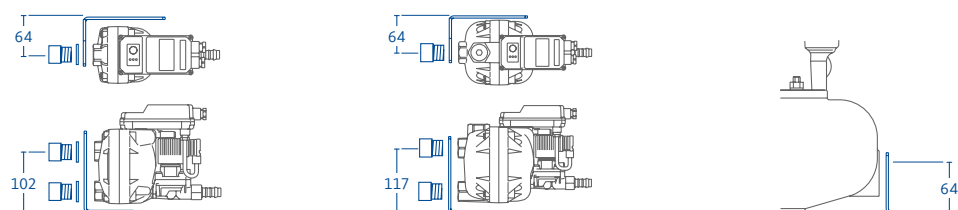


Dimensions in mm


For BEKOMAT®	13 13 CO	14 14 CO	16 6 CO 6 CO LA
Price group 13			
Order ref.	2000036	2000037	2000038
Price (€)	40	42	32




BEKOMAT®: Connection Kit



Valve for inlet with threaded connection




Manual drain, valve for inlet with threaded connection



Manual drain, valves for venting pipe and inlet threaded connections


For BEKOMAT®	20 21 12 12 CO 31U 32U	13 13 CO 33U 33U CO	14 14 CO	13 13 CO 33U 33U CO	14 14 CO
Price group 13					
Order ref.	2000039	2000040	2000042	2000041	2000043
Price (€)	19	27	41	62	71



Manual drain, valves for venting pipe and inlet threaded connections

For BEKOMAT®	16 16 CO
Price group 13	
Order ref.	2000044
Price (€)	66

BEKOMAT®: Discharge Kit



Hose + Installation material

For BEKOMAT®	10 12 12 CO 20 21 31U 32U	13 13 CO 14 14 CO 16 CO 33U 33U CO
Price group 13		
Order ref.	2000045	2000046
Price (€)	27	28



BEKOMAT® Spare Parts

For BEKOMAT®	20	20 FM	21	21 PRO	12	12 CO	12 CO PN 63	12 CO NI	12 KW
Price group 13									
Wearing part set	4003701	4003701	2001365	2001365	2000049	2000049	2000748	–	–
Price (€)	46	46	47	47	65	65	73	–	–
Diaphragms 3 pcs	2000496	2000496	2000496	2000496	4003555	4003555	2000437	–	–
Price (€)	59*1	59*1	59*1	59*1	88	88	121	–	–
Diaphragm seat	4003700	4003700	2001367	2001367	2800829	2800829	–	–	–
Price (€)	36	36	32	32	38	38	–	–	–
Valve	–	–	–	–	4027846	4027847	4027848	–	–
Price (€)	–	–	–	–	83	99	396	–	–
Valve attachment components	–	–	–	–	2000052	2000053	2000054	–	–
Price (€)	–	–	–	–	27	29	322	–	–
Sealing kit	–	–	2001366	2001366	2000058	2000058	2000749	2000058	2000058
Price (€)	–	–	23	23	19	19	21	19	19
Housing	–	–	–	–	2000060	2000061	2000234	–	2000192
Price (€)	–	–	–	–	66	106	107	–	93
Housing cover	–	–	–	–	–	–	–	–	–
Price (€)	–	–	–	–	–	–	–	–	–
Top cover	4003703	4003704	2001913	2001914	2000066	2000066	2000066	2000066	2000194
Price (€)	50	53	50	50	65	65	65	65	66
Sensor control board	–	4003705	–	2001494	2000062	2000062	2000062	2002770	2000193
Price (€)	–	140	–	110	171	171	171	178	168
Sensor PCB 230 VAC	4003706	2001501	2001488	2001495	2000063	2000063	2000063	2000063	2000063
Price (€)	104	64	104	64	83	83	83	83	83
Sensor PCB 200 VAC	4004089	4001278	4004089	4001277	2000349	2000349	2000349	2000349	2000349
Price (€)	104	64	104	64	83	83	83	83	83
Sensor PCB 115 VAC	4003707	2001502	2001489	2001496	2000064	2000064	2000064	2000064	2000064
Price (€)	104	64	104**2	64	83	83	83	83	83
Sensor PCB 100VAC	4003708	4001276	4001273	4001275	2000611	2000611	2000611	2000611	2000611
Price (€)	104	64	104**2	64	83	83	83	83	83
Sensor PCB 24 VAC	4003709	2001504	2001490	2001497	2000065	2000065	2000065	2000065	2000065
Price (€)	104	64	104**2	64	83	83	83	83	83
Sensor PCB 24 VDC	–	2001915	–	2001498	2000756	2000756	2000756	2000756	2000756
Price (€)	–	64	–	64	83	83	83	83	83

* For BEKOMAT® 20 | 20 FM | 21 | 21 PRO: 5 pcs.

** Electronic control board with integrated power supply

Generally we recommend having PCBs and boards changed by BEKO TECHNOLOGIES.



For BEKOMAT®	13	13 CO	13 CO PN 25 40 50	14	14 CO	14 CO PN 25	16 CO
Price group 13							
Wearing part set	2000067	2000067	2000366	2000731	2000731	2002556	2000087
Price (€)	68	68	82	68	68	85	86
Diaphragms 3 pcs	4002451	4002451	2000439	4002451	4002451	2000439	4002451
Price (€)	120	120	139	120	120	139	120
Diaphragm seat	2001118	2001118	2000351	2001118	2001118	2000351	–
Price (€)	33	33	125	33	33	125	–
Valve	4027849	4027850	4027851	4027849	4027850	4027851	2000089
Price (€)	103	121	450	103	121	450	139
Valve attachment components	2000071	2000072	2000371	2000071	2000072	2000371	2000088
Price (€)	39	42	374	39	42	374	34
Sealing kit	2000073	2000073	2000367	2000080	2000080	4000923	2000090
Price (€)	21	21	23	21	21	24	21
Housing	2000075	2000076	2000368	2000082	2000083	2000083	2000092
Price (€)	159	301	403	197	365	365	754
Housing cover	2000077	2000078	2000369	2000084	2000085	2000085	2000091
Price (€)	73	242	280	118	260	260	319
Top cover	2000066	2000066	2000066	2000066	2000066	2000066	2000066
Price (€)	65	65	65	65	65	65	65
Sensor control board	2000079	2000079	2000079	2000086	2000086	2000086	2000093
Price (€)	171	171	171	178	178	178	178
Sensor PCB 230 VAC	2000063	2000063	2000063	2000063	2000063	2000063	2000063
Price (€)	83	83	83	83	83	83	83
Sensor PCB 200 VAC	2000349	2000349	2000349	2000349	2000349	2000349	2000349
Price (€)	83	83	83	83	83	83	83
Sensor PCB 115 VAC	2000064	2000064	2000064	2000064	2000064	2000064	2000064
Price (€)	83	83	83	83	83	83	83
Sensor PCB 100 VAC	2000611	2000611	2000611	2000611	2000611	2000611	2000611
Price (€)	83	83	83	83	83	83	83
Sensor PCB 24 VAC	2000065	2000065	2000065	2000065	2000065	2000065	2000065
Price (€)	83	83	83	83	83	83	83
Sensor PCB 24 VDC	2000756	2000756	2000756	2000756	2000756	2000756	2000756
Price (€)	83	83	83	83	83	83	83

For BEKOMAT®	31U	32U	33U	33U CO
Price group 13				
Connection adapter	4010155	4010155	–	–
Price (€)	35	35	–	–
Sealing kit	4024386	4024392	4024397	4024397
Price (€)	12	12	13	13
Designshell	4010164	4010167	4010167	4010167
Price (€)	14	19	19	19
Price group 12				
Service unit	4023607	4023571	4023633	4023635
Price (€)	103	112	147	173



BEKOMAT® Spare Parts

For BEKOMAT®	3*3	3 CO*3 3 CO LA*3	3 E*3	3 E 25*3	3 E 63*3	6 CO*3 6 CO LA*3	6 E 25*3
Price group 13							
Wearing part set	2800656	2800670	2800702	2800702	2800702	2800670	2800702
Price (€)	71	73	101	101	101	73	101
Diaphragms 3 pcs	4002451	4002451	4002451	4002451	4002451	4002451	4002451
Price (€)	120	120	120	120	120	120	120
Sealing kit	2800658	2800671	2800689	2800703	2800703	2800658	2800703
Price (€)	19	19	39	39	39	19	39
Top cover	2800661	2800661	2800690	2800690	2800690	2800661	2800690
Price (€)	72	72	72	72	72	72	72
Service air valve	2800663	2800717	2800692	2800717	2800717	2800663	2800717
Price (€)	69	83	on request	83	83	69	83
Control air cap	2800665	–	–	–	–	2800665	–
Price (€)	26	–	–	–	–	26	–
Valve*4	2800664	2800673	2800693	2800705	2800718	2800664	2800705
Price (€)	128	262	352	352	364	128	352
Upper housing*5	2800667	2800674	2800696	2800696	2800719	2800789	–
Price (€)	262	344 *6	1,389	1,389	1,389	344	–
Bottom housing	2800668	2800675	2800720	2800720	2800720	2800790	–
Price (€)	112	194	846	846	846	802	–
Sensor board 230 VAC	2800659	2800659	2800659	2800659	2800659	2800796	2800796
Price (€)	246	246	246	246	246	247	247
Sensor board 100 VAC	2002200	2002200	2002200	2002200	2002200	–	–
Price (€)	278	278	278	278	278	–	–
Sensor board 110 VAC	2800698	2800698	2800698	2800698	2800698	2800804	2800804
Price (€)	278	278	278	278	278	287	287
Sensor board 24 VAC	2800699	2800699	2800699	2800699	2800699	4010781	4010781
Price (€)	278	278	278	278	278	279	279
Sensor board 24 VDC	–	–	–	–	–	2800806	2800806
Price (€)	–	–	–	–	–	280	280

BEKOMAT® 3 ... EX*3 | 3 ... LP*3 | 6 ... EX*3 | 6 ... LP*3: Spare parts on request, specify BEKOMAT® Ex number and/or serial number.

*3 Spare parts for BEKOMAT® LP versions: The spare parts sets for LP-units excluding Ex LP-units are identical with those of the corresponding BEKOMAT® 3 or 6 unit without the LP addendum (e.g. the spare parts for the BEKOMAT® 3 CO are also valid for the BEKOMAT® 3 CO LP).
Caution: The membrane needs to be installed in the BEKOMAT LP unit without spring.

*4 Valves for BEKOMAT® types 2, 3 and 6 depend on operating current. Other types m.a. are suitable for 230 VAC and 12 VDC for Ex-units.
Other voltages on request.

*5 When ordering an upper housing for an LP unit, please clearly specify "for LP unit" in the order.

*6 Not for BEKOMAT® 3 LA




Economic efficiency in new dimensions

Disposal of the condensate via external service providers is complex and expensive. Here, ÖWAMAT® offers a clear cost-saving potential.

ÖWAMAT® Separating dispersed condensates


Compressed air condensate often consists of 99 % water and 1 % oil. That is why on-site treatment of oil-contaminated condensate using ÖWAMAT® oil-water separation systems will always be more economic than cost-intensive disposal by specialist firms. Thanks to their functional principle, ÖWAMAT® oil-water separation systems do not cause any energy costs. They have proven their effectiveness for many years and undergone constant further development. ÖWAMAT® oil-water

separation systems – officially approved by the German Institute of Construction Engineering, Berlin – comply with the relevant legislation, and the treated water can simply be discharged into a public sewer. **BEKO TECHNOLOGIES**'s oil-water separators guarantee reliable treatment and require very little maintenance; the design is space saving and operator friendly. Your **BEKO TECHNOLOGIES** specialist will be glad to provide you with detailed information.

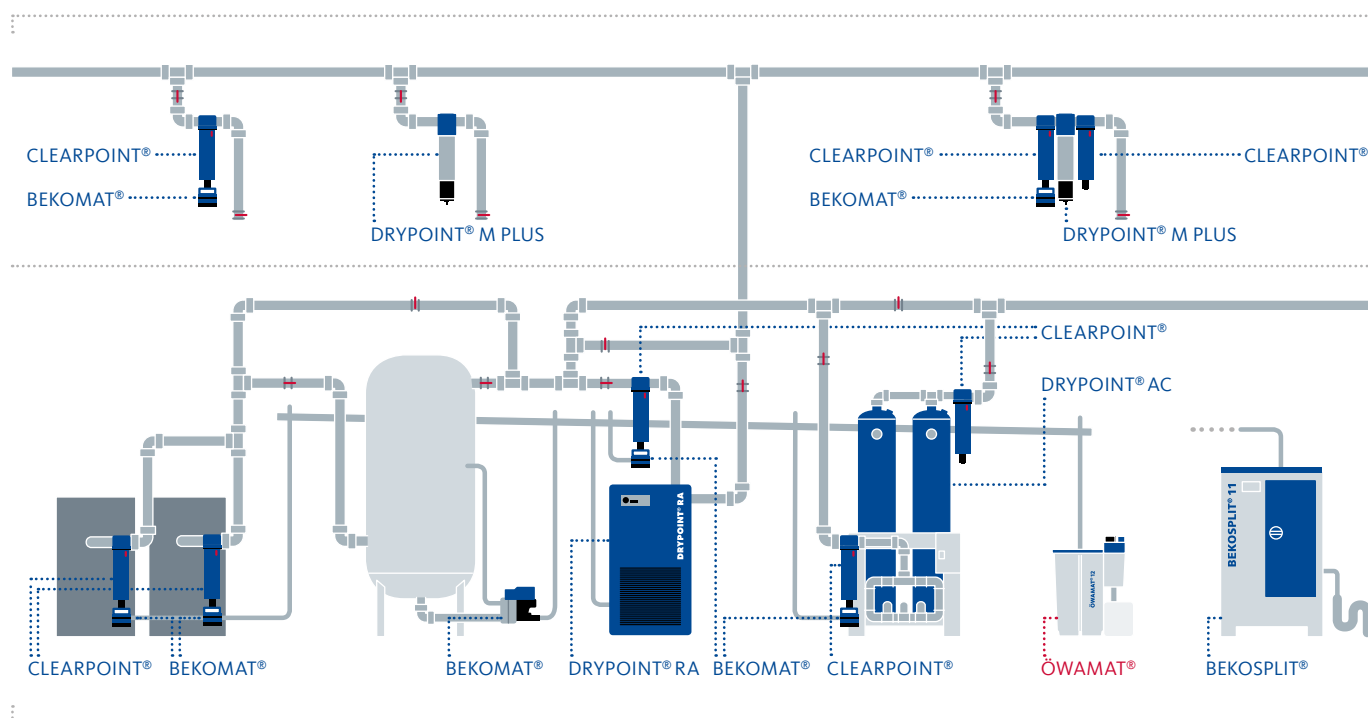



ÖWAMAT®: Specifications for worldwide use

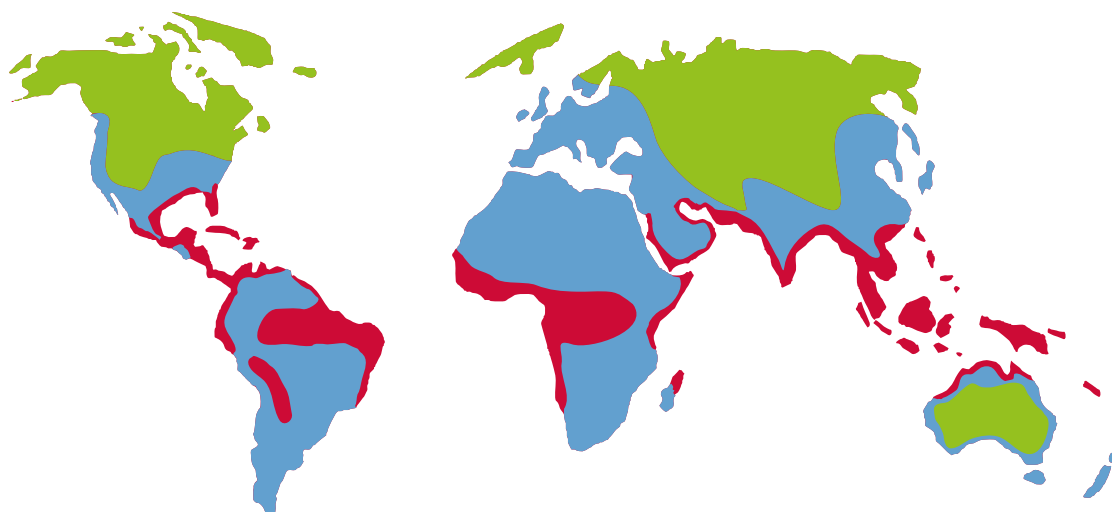

The capacity figures in this price list refer to the "■" climate zone.

ÖWAMAT®	10	11	12*	14*	15*	16*
---------	----	----	-----	-----	-----	-----

Compressor performance (m³/min)

Screw compressor

Turbine oil	■	2.8	5.5	8.5	16.9	33.6	67.3
	■	2.4	4.9	7.3	14.6	29.3	58.5
	■	2.1	4.2	6.2	12.5	24.9	49.7
Screw compressor VDL oil	■	2.8	5.5	8.5	16.9	33.6	67.3
	■	2.4	4.9	7.3	14.6	29.3	58.5
	■	2.1	4.2	6.2	12.5	24.9	49.7
Screw compressor VCL oil	■	2.1	4.2	6.5	13.0	25.9	51.8
	■	1.9	3.8	5.6	11.3	22.5	45.0
	■	1.6	3.2	4.8	9.6	19.1	38.3
Synthetic oil: PAO (possible performance deviation +/-20 %)	■	2.1	4.2	6.5	13.0	25.9	51.8
	■	1.9	3.8	5.6	11.3	22.5	45.0
	■	1.6	3.2	4.8	9.6	19.1	38.3
Synthetic oil: Ester (possible performance deviation +/-40 %)	■	1.8	3.6	5.5	11.1	22.0	44.0
	■	1.6	3.2	4.8	9.6	19.1	38.3
	■	1.4	2.8	4.0	8.2	16.3	32.5

Piston compressor

VDL oil	■	1.9	3.8	5.9	11.7	23.3	46.6
	■	1.7	3.4	5.1	10.1	20.3	40.5
	■	1.5	2.9	4.3	8.7	17.2	34.4
Synthetic oil: PAO (possible performance deviation +/-20 %)	■	1.6	3.2	4.9	9.8	19.4	38.8
	■	1.4	2.8	4.2	8.4	16.9	33.8
	■	1.2	2.4	3.6	7.2	14.3	28.7
Synthetic oil: Ester (possible performance deviation +/-40 %)	■	1.8	3.7	5.6	11.2	22.3	44.6
	■	1.6	3.2	4.9	9.7	19.4	38.8
	■	1.4	2.8	4.1	8.3	16.5	33.0

Adjusted capacity figures for ÖWAMAT®

Capacity tests and our long experience have enabled us to make locational adjustments of our capacity figures for BEKOMAT® and ÖWAMAT®. By taking global climate data into account, the device capacity can be defined more specifically in relation to the place of application.

ÖWAMAT® is designed for a region by means of the three climatic zones:


- e.g. Northern Europe, Canada, Northern USA, Central Asia
- e.g. Central and Southern Europe, Central America
- e.g. South-East Asian coastal regions, Oceania, Amazon and Congo region



ÖWAMAT® oil-water separation systems are available for sizes 12 to 16 with or without the separation of free oils. The separation of free oils extends the life cycle of the OEKOSORB® filter cartridge applied. Depending on the case of application,

however, the use of an ÖWAMAT® without free-oil separation can be sufficient. Both versions have type approval for synthetic and mineral oils.


ÖWAMAT® Oil-Water Separator: 12 | 14 | 15 | 16 with pre-separation system

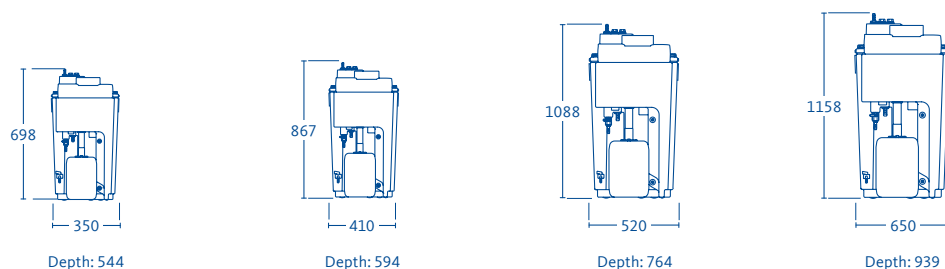

Dimensions in mm

ÖWAMAT®	12	14	15	16
Condensate feed	3 x G½ 1 x G1	3 x G½ 1 x G1	3 x G½ 1 x G1	3 x G½ 1 x G1
Tank Capacity (l)	30.6	61.3	115.5	228.4
Filling Capacity (l)	22.72	46.34	84.28	158.8
Filter Capacity (l)	1 x 2.5 1x5.9	1 x 6.7 1x11.0	1 x 18.5 1x20.4	1 x 37.2 1x40.3
Weight (kg)	13.5	18.5	36.5	53
Price group 20				
Order ref.	4021726	4021742	4021758	4021773
Price (€)	992	1,196	1,602	2,173

ÖWAMAT® Oil-Water Separator: 10 | 11 | 12 | 14 | 15 | 16 without pre-separation system

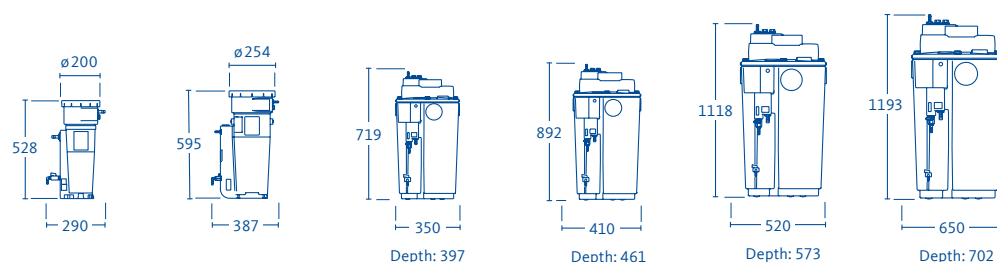

Dimensions in mm

ÖWAMAT®	10	11	12	14	15	16
Condensate feed	2 x G½	2 x G½	3 x G½ 1 x G1	3 x G½ 1 x G1	3 x G½ 1 x G1	3 x G½ 1 x G1
Tank Capacity (l)	10	18.6	30.6	61.3	115.5	228.4
Filling Capacity (l)	4.3	11.7	20.3	41.5	72.5	137.2
Filter Capacity (l)	1 x 2.5 1 x 2.6	1 x 4.7 1 x 4.8	1 x 2.5 1 x 5.9	1 x 6.7 1 x 11.0	1 x 18.5 1 x 20.4	1 x 37.2 1 x 40.3
Weight (kg)	3,5	5,75	12	16	32	42
Price group 20						
Order ref.	4010347	4011570	4022368	4022379	4022388	4022400
Price (€)	319	520	773	967	1,328	1,811



ÖWAMAT® Accessories

ÖWAMAT®: Heating



From serial no. 155,000
onwards, others on request


For ÖWAMAT®	2 11 12		4 5R 14 15		6 16		8		Heating for condensate Manifold (old version)
Performance (kw)	0.3 0.4	0.33 0.43	0.75 1.0	0.92 1.1	1.1 1.4	1.15 1.5	2x1.1 1.4	2x1.15 1.5	0.038 0.05
Voltage (VAC)	200 230	100 115	200 230	100 115	200 230	100 115	200 230	100 115	200 230
Weight (kg)	0.7	0.7	1	1	1.1	1.1	2.2	2.2	0.7
Price group 23									
Order ref.	4001748	4001747	4001750	4001749	4001752	4001751	4001808	4001809	4002180
Price (€)	388	on request	407	407	467	467	820	820	319

OEKOSORB®: Replacement Filter Sets for ÖWAMAT® 10 | 11 | 12 | 14 | 15 | 16


For ÖWAMAT®	10	11	12	14	15	16
Prefilter (l)	1 x 2.5	1 x 4.7	1 x 2.5	1 x 6.7	1 x 18.5	1 x 37.2
Main filter (l)	1 x 2.6	1 x 4.8	1 x 5.9	1 x 11	1 x 20.4	1 x 40.3
Weight (kg)	0.5	1.98	1.98	3.38	6.03	11.12
Price group 22						
Order ref.	4010719	4011999	4010711	4010712	4010713	4010714
Price (€)	84	113	140	194	313	534

OEKOSORB®: Replacement Filter Sets for ÖWAMAT® 1 | 2 | 3 | 4 | 5 | 5R | 6 | 8 | 20

For ÖWAMAT®	1 2	3	4	5	5R	6	8	20
Prefilter (l)	1 x 2	–	1 x 4.5	–	1 x 9	1 x 9	1 x 30	–
Main filter (l)	1 x 3	1 x 15	1 x 8	2 x 18	1 x 17	2 x 17	2 x 45	1 x 82
Weight (kg)	1	2.5	3	7.5	4.5	9	25	23
Price group 22								
Order ref.	4027544	4027548	4027550	4027554	4027556	4027557	4027562	4027546
Price (€)	83	125	148	264	183	308	764	555


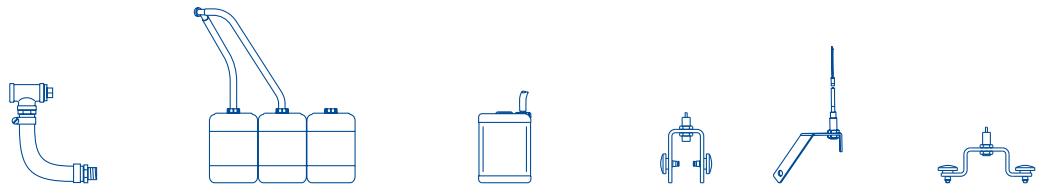


	Connection set for collecting line		Tandem oil collector set	Clear water collector		Alarm sensor for level indicator			
For ÖWAMAT®	2 12	4 5R 6 8 14 15 16	8	2 10 11	3 4	2	11	4 5R 6 8	12 14 15 16
Tank Capacity (l)	–	–	3 x 30	1 x 10	1 x 30	–	–	–	–
Price group 23									
Order ref.	2001045	2000912	2801311	2801297	2801304	2801298	4012448	2801309	4013908
Price (€)	25	34	140	62	69	132	132	142	138

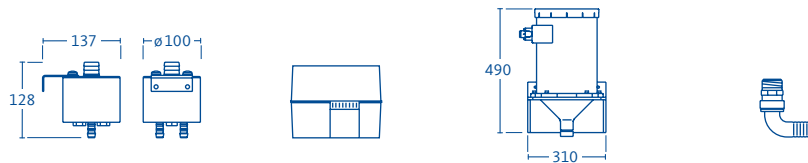

Dimensions in mm	for parallel operation of up to 4 units	in a practical plastic box		max. 40 bar [g] for relief air from piston compressors	for the water outlet at the ÖWAMAT® 14–16		
	Condensate Manifold	Reference test kit		HP-relief chamber	Bracket adapter	Condensate Quick-test set	
Specification		10 mg/l	20 mg/l				re-fill
Tank Capacity (l)	–	–	–	14	–	–	–
Weight (kg)	–	–	–	4.6	–	–	–
Price group 23							
Order ref.	4003998	2002225	2801288	2801292	4012513	4012237	4012507
Price (€)	190	74	74	377	34	69	49

ÖWAMAT®: Spill Protection Basin



For ÖWAMAT®	2 12	14	4 15	16	5R 6	8
Dimensions (mm) A x B x C	180 x 600 x 500	230 x 700 x 600	230 x 900 x 800	250 x 1,100 x 900	250 x 1,200 x 1,000	600 x 1,306 x 1,106
Price group 24						
Order ref.	4007066	4010771	4007067	4010772	4007068	4006865
Price (€)	216	283	319	369	416	751

Prices quoted are net.



ÖWAMAT® Spare parts

For ÖWAMAT®	10	11	12	14	15	16
Price group 23						
Pressure relief chamber for version with pre-separation system without inlet adapter	–	–	4012139	4012139	4012141	4012141
Price (€)	–	–	114	114	157	157
Pressure relief chamber for version without pre-separation system without inlet adapter	–	–	4012140	4012140	4012142	4012142
Price (€)	–	–	114	114	157	157
Multiple inlet adapter for pressure relief chamber	–	–	2002851	2002851	2001046	2001046
Price (€)	–	–	28	28	28	28
Pre-separation tank up to serial number 11046999	–	–	4012135	4012136	4012137	4012138
Price (€)	–	–	93	114	147	178
Pre-separation tank as from serial number 11047000 up to 12438529	–	–	4014076	4014077	4014078	4014079
Price (€)	–	–	93	114	147	178
Pre-separation tank as from serial number 12438530	–	–	4021012	4021013	4021014	4021015
Price (€)	–	–	107	114	221	196
Pre separation stand	–	–	4012162	4012163	4012164	4012165
Price (€)	–	–	60	66	71	81
Cover for version with pre-separation system	–	–	4012342	4012343	4012344	4012345
Price (€)	–	–	93	114	141	173
Cover for version without pre-separation system	–	–	4012346	4012347	4012349	4012350
Price (€)	–	–	93	114	139	169
Container up to serial number 12438529	4012557	4012559	4012503	4012504	4012505	4012506
Price (€)	157	259	on request	584	747	909
Container as from serial number 12438530	–	–	4021007	4021009	4021010	4021011
Price (€)	–	–	422	584	907	909
Overflow pipe / Condensate pipe up to serial number 12438529	–	–	4012564	4012565	4012566	4012567
Price (€)	–	–	40	53	80	84
Overflow pipe / Condensate pipe as from serial number 12438530	–	–	4021003	4021004	4021005	4021006
Price (€)	–	–	40	53	80	84
Handle Cartridge	–	–	4012356	4012357	4012358	4012359
Price (€)	–	–	38	43	47	53
Oil collector set	–	–	2801295	2801295	4012569	2801302
Price (€)	–	–	35	35	42	47
Universal set Service valve sampling valve	4012379	–	4012379	4012379	4012379	4012379
Price (€)	19	–	19	19	19	19
Sampling valve	–	2800891	–	–	–	–
Price (€)	–	19	–	–	–	–
Mounting bracket	4004277	4012186	–	–	–	–
Price (€)	52	58	–	–	–	–
Inlet pipe	4012561	4012562	–	–	–	–
Price (€)	43	49	–	–	–	–
Sealing kit	4013857	4013858	–	–	–	–
Price (€)	21	22	–	–	–	–
Sealing kit up to serial number 11046999	–	–	4013859	4013859	4013860	4013860
Price (€)	–	–	42	42	59	59
Sealing kit as from serial number 11047000 up to 12438529	–	–	4013980	4013980	4013981	4013981
Price (€)	–	–	42	42	59	59
Sealing kit as from serial number 12438530	–	–	4022580	4022580	4022581	4022581
Price (€)	–	–	42	42	59	59



For ÖWAMAT®	10	11	12	14	15	16
Price group 23						
Reference turbidity tube 20 mg/l	2000556	2000556	2000556	2000556	2000556	2000556
Price (€)	11	11	11	11	11	11
Reference turbidity tube 10 mg/l	4001475	4001475	4001475	4001475	4001475	4001475
Price (€)	11	11	11	11	11	11
Reference turbidity tube 5 mg/l	4012341	4012341	4012341	4012341	4012341	4012341
Price (€)	11	11	11	11	11	11

For ÖWAMAT®	1	2	4	5R	6	8
Price group 23						
Pressure relief chamber without inlet adapter	–	2800864	2800887	2800887	2800906	2800906
Price (€)	–	139	248	248	259	259
Multiple inlet adapter	–	2002851	2002851	2002851	2001046	2001046
Price (€)	–	28	28	28	28	28
Filter set for pressure relief chamber	4004290	2800866	2800889	2800889	2800909	2800909
Price (€)	28	23	26	26	29	29
Dirt trap	–	–	–	–	2800907	2800917
Price (€)	–	–	–	–	on request	111
Cover with level sensor	–	2800865	2800888	2001912	2800916	2800918
Price (€)	–	133	189	174	211	384
Level sensor	–	2800871	2800896	2800896	2800896	2800924
Price (€)	–	17	21	21	21	21
Lid mounting set	–	–	2800894	2800894	2800912	2800923
Price (€)	–	–	15	15	16	19
Bottom container	–	–	–	–	–	–
Price (€)	On request with identification of the serial number					
Overflow pipe in filter chamber	–	–	2800897	2800897	2800897	2800922
Price (€)	–	–	17	17	17	32
Oil outlet pipe	–	2800867	2800890	2001911	2800910	2800919
Price (€)	–	112	53	60	66	71
Sample valve	2800891	2800891	2800891	2800891	2800891	2800891
Price (€)	19	19	19	19	19	19
Oil collector set	–	2801295	2801302	2801302	2801307	2801307
Price (€)	–	35	47	47	58	58
Mounting bracket	4004277	–	–	–	–	–
Price (€)	52	–	–	–	–	–
Sealing Kit	–	4005820	4006474	4006474	4006474	–
Price (€)	–	19	25	25	25	–
Reference test jar 20 mg/l	2000556	2801291	2801291	2801291	2801291	2801291
Price (€)	11	43	43	43	43	43
Reference test jar 10 mg/l	4001475	2002342	2002342	2002342	2002342	2002342
Price (€)	11	43	43	43	43	43



ÖWAMAT® Spare parts

For ÖWAMAT®	3	5	20
Price group 23			
Filter Set for Pressure Relief Chamber	On request at the BEKO TECHNOLOGIES Service		
Coalescence filter	-	-	2800930
Price (€)	-	-	1,046

ÖWAMAT® Service

For ÖWAMAT® 10 – 16	Analysis condensate suitability
Price group 25	
Order ref.	4014016
Price (€)	26

	Bottle for condensate sample
Volume (ml)	1.000
Price group 23	
Order ref.	2801315
Price (€)	23


	Analyse of mineral oil hydrocarbons according to DIN EN ISO 9377-2 (KW Index)
Required Sample (ml)	1.000
Price group 35	
Order ref.	2800435
Price (€)	79



BEKOSPLIT® splitting plants for the tough jobs

Stable emulsions from oil-contaminated condensate cannot be treated using oil-water separation systems. With BEKOSPLIT® the operator can ensure independent and very economic treatment of these emulsions.


BEKOSPLIT® plants have been officially approved by the German Institute of Construction Engineering, Berlin. Your **BEKO TECHNOLOGIES** specialist will be glad to provide you with detailed information.

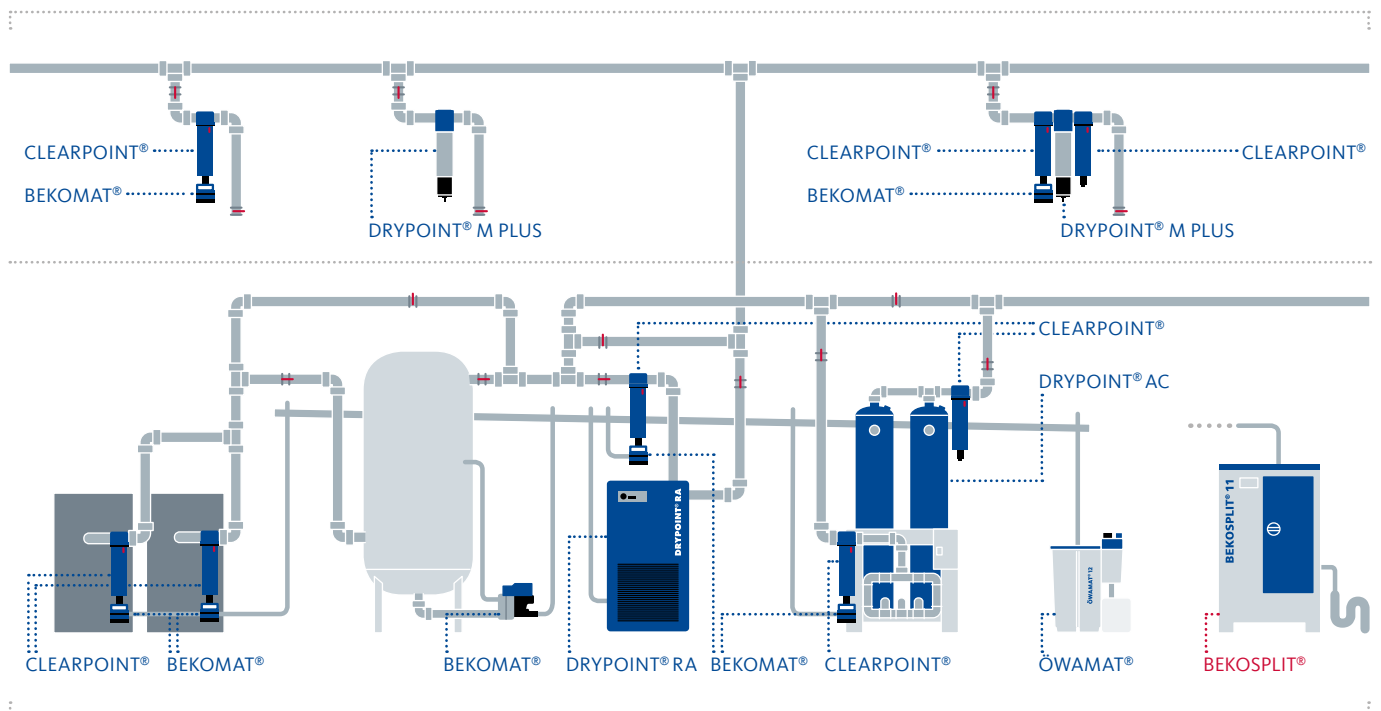



BEKOSPLIT® Emulsion splitting plant

BEKOSPLIT®: 11 | 12 | 13 | 14 | 14 S | 15 | 16

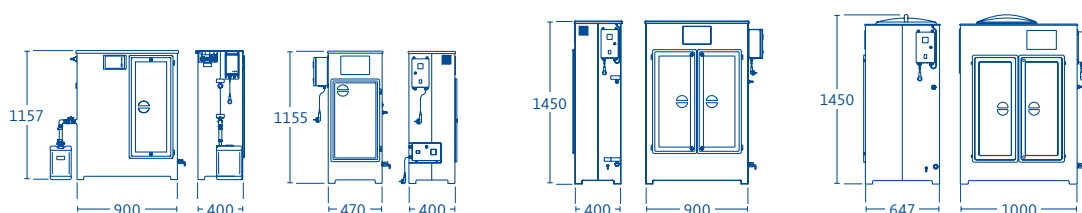

Dimensions in mm	with integrated 70 l pre-separation tank and 10 l oil collector	Splitting plant		Splitting plant		Splitting plant with 25 kg metering unit	Splitting plant	
BEKOSPLIT®	11	12	13	14	14 S*	15	16	
Compr. Capacity max. (m³/min)	12,5	25	50	75	75	100	135	
Performance (l/h)	15	30	60	90	90	120	160	
Voltage (VAC)	100 ... 240	230	230	230	230	230	230	
Weight (kg)	48	33	54	54	55	76	76	
Price group 30								
Order ref.	2002566	2800108	2000252	2000253	4003800	4003902	4003903	
Price (€)	6,360	6,701	8,847	9,791	15,125	14,830	16,609	

The expendable materials that are necessary for BEKOSPLIT® operation are not included and have to be ordered separately. The costs for putting a BEKOSPLIT® plant into operation are not included in the purchase price! Operation of BEKOSPLIT® plants 12-16 requires a pre-separation tank.

* Depth BEKOSPLIT® 14 S: 585 mm

BEKOSPLIT® Expendable materials


Splitting Agent	FL 02		FL 11	
Packing unit	1	1	1	1
Weight (kg)	10	25	10	25
Price group 33				
Order ref.	4020598	4020596	4021427	4021430
Price (€)	101	175	63	126

	Replacement Filter Set			Replacement Fleece Filter Set		
For BEKOSPLIT®	11 12	3 5 13 14 14 S 15 16		11 12	3 5 13 14 14 S 15 16	
Packing unit	5	5		5	5	
Weight (kg)	1	1		1	1	
Price group 33						
Order ref.	4012868	4012870		4012867	4012869	
Price (€)	69	82		133	158	



BEKOSPLIT® Accessories

BEKOSPLIT®: Pre-Separation Tank | Buffer Tank

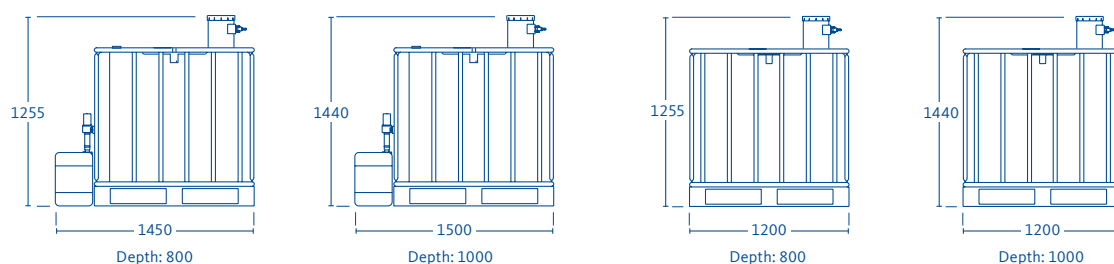

Dimensions in mm

	Pre-Separation Tank*		Buffer Tank**	
For BEKOSPLIT®	12 13 14 14 S	12 – 16	12 – 16	
Tank Capacity (l)	600	1000	600	1000
Price group 33				
Order ref.	2801225	2801226	2002549	2002550
Price (€)	2,207	2,504	2,545	2,812

* Incl. pressure relief chamber, integrated oil separation and capacitive START sensor.

** Incl. pressure relief chamber, immersion pump with float-switch for pump operation and float-switch "Tank FULL"

BEKOSPLIT® with pump control relay on request.

BEKOSPLIT®: Spill Protection Basin




	Spill Protection Basin		
Tank Capacity (l)	205	607	1,000
Dimensions* (mm) A x B x C	335 x 1,300 x 800	340 x 2,500 x 1,200	334 x 2,800 x 1,790
Price group 34			
Order ref.	4011185	4011184	4011181
Price (€)	516	1,254	1,876

* Other sizes on request.

Prices quoted are net.



BEKOSPLIT® Accessories

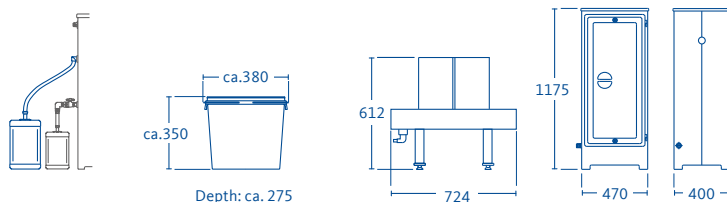

Dimensions in mm

Dimensions in mm				Overflow monitoring	
	Overflow Set	Drying Rack		Filter Module	Float Switch
For BEKOSPLIT®	11	11 12	13 14 14 S 15 16	14 S 15 16	13 14 14 S 15 16
Voltage VAC Hz	–	–	–	–	–
Price group 33					
Order ref.	2002333	2002628	2801210	4005475	–
Price (€)	79	62	538	1,456	on request

BEKOSPLIT® Service

	According to DIN EN ISO 9377-2 H53 of treated or untreated condensate			(e.g. Cu, Ni, Zn, Cr, Cd, Pb, Hg) per element	
	Mineral oil hydrocarbons	Determination of the TOC value	Determination of required splitting agent quantity	Heavy metals	Determination of the COD value
Required Sample (ml)	1,000	300	2,000	250	100
Price group 35					
Order ref.	2800435	4002562	2800440	2800438	2800439
Price (€)	79	79	51	52	71

Other analyses are possible on request!
Prices quoted are net.

	Bottle for condensate sample
Volume (ml)	1.000
Price group 23	
Order ref.	2801315
Price (€)	23



BEKOSPLIT® Spare parts

BEKOSPLIT® Spare parts: Pre-separation tank

			integrated	integrated	integrated
For BEKOSPLIT®			3	5	11
Tank Capacity (l)	600	1,000			
Price group 23					
Pressure relief chamber without inlet adapter	2800887	2800887	–	–	4006830
Price (€)	248	248	–	–	155
Filter set for pressure relief chamber	2800889	2800889	2800909	2800909	2800866
Price (€)	26	26	29	29	23
Multiple inlet adapter for pressure relief chamber	2001046	2001046	–	2001046	2001046
Price (€)	28	28	–	28	28
Price group 33					
Oil sump valve complete	2000101	2000101	–	–	–
Price (€)	467	467	–	–	–
Connecting cable for oil sump valve	4006840	4006840	–	–	–
Price (€)	64	64	–	on request	–
Oil sump receptacle Set	2000379	2000400	–	–	4000874
Price (€)	64	84	–	on request	103
Oil sump receptacle	2000380	4003931	4003931	–	2000380
Price (€)	21	37	37	–	21
Mounting Plate, complete (without sensor)	2000599	2000600	–	–	2002859
Price (€)	199	199	–	–	199
Start sensor (water tuned, without cable)	2000012	2000012	–	–	2000012
Price (€)	353	353	–	–	353
Connecting cable for start sensor	4005040	4005040	–	–	–
Price (€)	41	41	–	–	–
Capacity sensor (oil tuned)	–	–	–	–	–
Price (€)	–	–	–	–	–

BEKOSPLIT® Spare parts: Buffer tank

Tank Capacity (l)	600	1,000	1,100	2,000
Price group 33				
Submersion pump with float switch	2800517	2800517	2800517	2800517
Price (€)	854	854	854	854



BEKOSPLIT® Spare parts

For BEKOSPLIT®	3	5	11	12	13	14	14 S	15	16
Price group 33									
Power supply unit	–	–	2002627	2000106	2000106	2000106	2000106	2000106	2000106
Price (€)	–	–	714	915	915	915	915	915	915
Electronic module	–	–	4002521	4001814	2000547	2000547	2000547	2000547	2000547
Price (€)	–	–	617	1,383	1,383	1,383	1,383	1,383	1,383
Operating-hour meter	2000011	2000011	4006147	2000011	2000011	2000011	2000011	2000011	2000011
Price (€)	77	77	120	77	77	77	77	77	77
Sensor Filter control	–	–	2000108	2000108	2000392	2000392	2000392	2000392	2000392
Price (€)	–	–	386	386	390	390	390	390	390
Sensor Splitting Agent	2800489	–	2000391	2000391	2000391	2000391	4002430	4002430	4002430
Price (€)	334	–	334	334	334	334	287	287	287
Emulsion pump	2800483	–	2002621	2800525	4003356	4003358	4003358	4004681	4004682
Price (€)	665	–	650	671	987	1,057	1,057	1,523	1,645
Gear motor for emulsion pump up to serial no. 10.046.560	2800484	–	2002623	2800484	2000386	2000387	–	4003715	4004382
Price (€)	279	–	279	279	279	385	–	279	495
Gear motor for emulsion pump as from serial no. 10.046.561	–	–	2002623	2800484	4003715	4003716	4003716	4003715	4004382
Price (€)	–	–	279	279	279	279	279	279	495
Dosage unit (without sensor)	–	–	2002619	4008082	4008082	4008082	4002431	4004380	4004380
Price (€)	Auf Anfr.	–	1,015	1,953	1,935	1,935	2,368	on request	on request
Gear motor for Dosage unit up to serial no. 10.400.702	–	–	2002622	2800476	2800476	2800476	4004568	4004568	4004568
Price (€)	Auf Anfr.	–	279	422	422	422	422	422	422
Gear motor for Dosage unit as from serial no. 10.400.703	–	–	2002622	4008380	4008380	4008380	4008380	4008380	4008380
Price (€)	Auf Anfr.	–	279	326	326	326	326	326	326
Stirrer	2800471	–	2002624	2002624	2000381	2000381	2000381	4004383	4004383
Price (€)	189	–	204	204	218	218	218	367	367
Stirrer motor	2000382	–	2002625	2002625	2000382	2000382	2000382	4004384	4004384
Price (€)	139	–	162	162	139	139	139	288	288
Stirrer shaft for chamber 1	2800473	–	2002626	2002626	2000399	2000399	2000399	4004388	4004388
Price (€)	65	–	76	76	81	81	81	95	95
Stirrer shaft for chamber 2	2800473	–	–	–	–	–	–	4004388	4004388
Price (€)	65	–	–	–	–	–	–	95	95
Door unit	–	–	4000861	2001938	2000568	2000568	2000568	2000568	2000568
Price (€)	–	–	205	199	372	372	372	372	372
Door, left	–	–	–	–	4001270	4001270	4001270	4001270	4001270
Price (€)	–	–	–	–	181	181	181	181	181
Door, right	–	–	–	–	4001271	4001271	4001271	4001271	4001271
Price (€)	–	–	–	–	227	227	227	227	227
Lid	–	–	4000864	2002305	2002837	2002837	2002837	–	–
Price (€)	–	–	160	115	140	140	140	–	–
Holding strap for filter bag, 2 pcs.	2800495	2800495	2800495	2800495	2800495	2800495	2800495	2800495	2800495
Price (€)	26	26	26	26	26	26	26	26	26
Pump hose set up to serial no. 10.046.560	2000388	–	2800527	2800527	2000446	2000446	4003590	4003712	4003712
Price (€)	52	–	46	46	75	75	64	71	71
Pump hose set as from serial no. 10.046.561	2000388	–	2800527	2800527	4003590	4003590	4003590	4003712	4003712
Price (€)	52	–	46	46	64	64	64	71	71
Brushes for motors up to serial no. 10.400.702	2800487	–	2000389	2000389	2000389	2000389	2000389	4003713	4014401
Price (€)	75	–	65	65	65	65	65	93	74
Brushes for motors as from serial no. 10.400.703	2800487	2800487	2000389	4014400	4014400	4014400	4014400	4003713	4014401
Price (€)	75	75	65	112	112	112	112	93	74